

# Agmar

**CATALOG** 

**WOODEN ENTRANCE DOORS** 

#### AGMAR DRZWI Mariusz Pasztaleniec Spółka Komandytowa

Chwałowice 97 37-455 Radomyśl nad Sanem

> **KRS:** 0000768917 NIP: 865-257-07-33 **REGON:** 382410839

# www.agmar.biz.pl



# Agmar



The doors we have been creating for you since 1998 are unique. They protect everything that is most precious to you, while also representing the place of your daily life. Therefore, it is important to choose the best possible doors that will meet all your requirements, both in terms of aesthetics and functionality.

Our doors are an exclusive product, created with attention to aesthetics, durability, and the natural environment for future generations. We strive to stand out not only with modern designs and meeting customer needs but also with social responsibility. Therefore, we take actions to combine modern machinery with the use of renewable energy sources. The energy needed for the production of our woodwork is largely obtained from our own wind farm and photovoltaic panels.



Our doors always reflect your needs, preferences and expectations.

**ENJOY OUR OFFER!** 



AGMAR doors are made from lumber sourced from forests with FSC certification.

This certification confirms compliance with the regulations of sustainable development, forest conservation, and nature protection.



COLLECTION **LAKOBEL** 

Pages 22 - 29



The main decorations of this door are

# N O X

elements - fashionable in the arrangements of modern homes.

The combination of wood with black,

# GLAZED GLASS

is a very effective solution.

Doors for lovers of MODERN and practical solutions.

and practical solutions. they will fit into houses with an avant-garde character.



CLASSIC
WITH
MODERNITY

The door collection

COLLECTION
CLASSIC
Pages 48 - 61


**CLASSIC** solutions confined in a timeless style.

ADMID	27	FLICE		1.41/4	20		
ADMIR	21	ELISE	11	LAVA	20	SALVE	55
AFRA	34	ERGO	31	LOTUS	52	SAMIRA	39
AGLE	16	EZIO	27	LUMEN	53	SARGAS	19
ANUBIS	36	FIORA	50	MAJALIS	53	SARPA 4	47
ASPERA	57	FOGO	12	MALAGA 2	43	SARPA 5	42
ATUM	39	FONES	15	MALAGA 3	46	SATINA	12
AURIGA	39	FROST	18	MARIO	55	SENGA	54
AVADA	33	GALIUM	58	MIDORI	58	SIRO	18
AWIOR	10	GEMINI	17	MILIO	54	SIVIR	37
AXEL	52	GIRA	15	MIMOSA	111	SORANA	13
BATUMI	35	GLOBAL	38	MINOR	17	STELLA	29
BEATUS	61	GRAND	47	MIRAGE	36	SURA	34
BELLIS	58	GRINGO	21	NEKSA	50	SYNDRA	28
BUTEO	17	HAKO	44	NORE	29	TENKA	45
CALLIX	50	HEDERA	32	ORDO	32	TRISTANA	23
CAMELIA	20	HERSA	57	ORIA	36	TURPIS	60
CAPRI	32	HORIZON	49	PABLO	59	UMBRA	44
CASUS	33	IBERIS	60	PABLO I	59		1
CIRILLA	51	ICARA	10	PALAU	42	UNO	19
CRISPA	26	IMPACT	37	PLATINO	19	VALOR	14
CYRUS	53	IMPERA	43	PROTON	51	VERITAS	60
DAGALA	29	JARLI	27	PULSAR	16	VICKY	56
DANTE	61	KABUKA	16	REGAL	45	VIRGO	13
DELOS	24	KARMINA	14	RIVEN	35	VISAGE	51
DEON	45	KARUTO	34	RIVIA	28	VITRUM	24
DERBE	38	KEFES	11	ROKO	54	VULMUS	61
DIADEM	10	KOBUS	42	ROSA	57	WIANKA	09
DINAR	33	KONGO	59	RUFUS	56	ZAJA	25
DOCTUS	55	LANTRA	41	RUST	25	ZENIT	21
DRACO	15	LARIX	46	SABLE	52	ZYRA	26
210.00	.5		10	3, \DLL	3-		


#### CONSTRUCTION OF THE **PANEL ENTRANCE DOOR**

#### CONSTRUCTION OF THE **PANEL ENTRANCE DOOR**










- **1.** Thermal insulation panel
- 2. Reinforcing steel profile
- **3.** Pine frame made of glued laminated timber, reinforced with a steel profile
- 5. Anti-theft frame
- 6. Three-plane adjustable hinge
- 7. 105x60 mm frame
- 8. Pine or oak sandwich panel

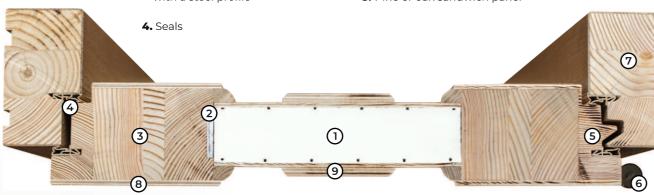

#### THE ENTRANCE DOOR, OPENING OUTWARDS

must be covered by canopies and possibly side guards.


#### THE ENTRANCE DOOR, OPENING INWARDS

must be completely covered with porches or other enclosures, or installed in undercuts.










2. Reinforcing steel profile

1. Thermal insulation panel

- **3.** Pine frame made of glued laminated timber, reinforced with a steel profile
- **7.** 105x60 mm frame
- 8. Pine or oak sandwich panel

**6.** Three-plane adjustable hinge

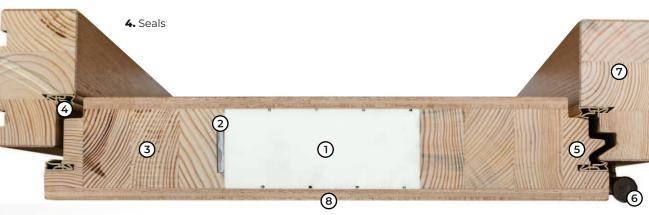

#### THE ENTRANCE DOOR, OPENING OUTWARDS

must be covered by canopies and possibly side guards.

#### THE ENTRANCE DOOR, OPENING INWARDS

must be completely covered with porches or other enclosures, or installed in undercuts.



COLLECTION

The main decorations of this door are

N O X

elements - fashionable in the arrangements of modern homes.



INOX on one side
MILLING on one side



COLLECTION INOX Panel Entrance Doors































one side





INOX on one side
MILLING on one side





INOX on one side
MILLING on one side



DOORS AVAILABLE IN THREE TYPES OF VENEER:



COLLECTION

The combination of wood with black, GLAZED

GLAZED GLASS

is a very effective solution.

MODEL TRISTANA

**LAKOBEL** on one side **MILLING** on one side







MODEL **ZAJA LAKOBEL** on one side **MILLING** on one side

DOORS AVAILABLE IN THREE TYPES OF VENEER:


















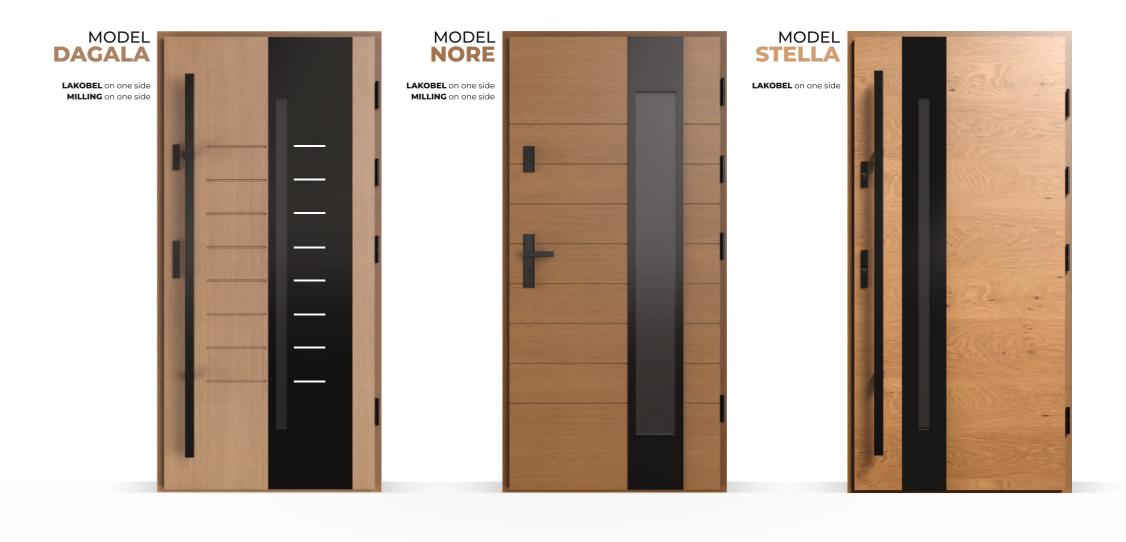

www.agmar.biz.pl

DOORS AVAILABLE IN THREE TYPES OF VENEER:





N

Doors for lovers of

# **MODERN**

and practical solutions. they will fit into houses with an avant-garde character.



MILLING on both sides



28





























CREATIVE


The door collection that combines

CLASSIC WITH MODERNITY




MILLING on both sides



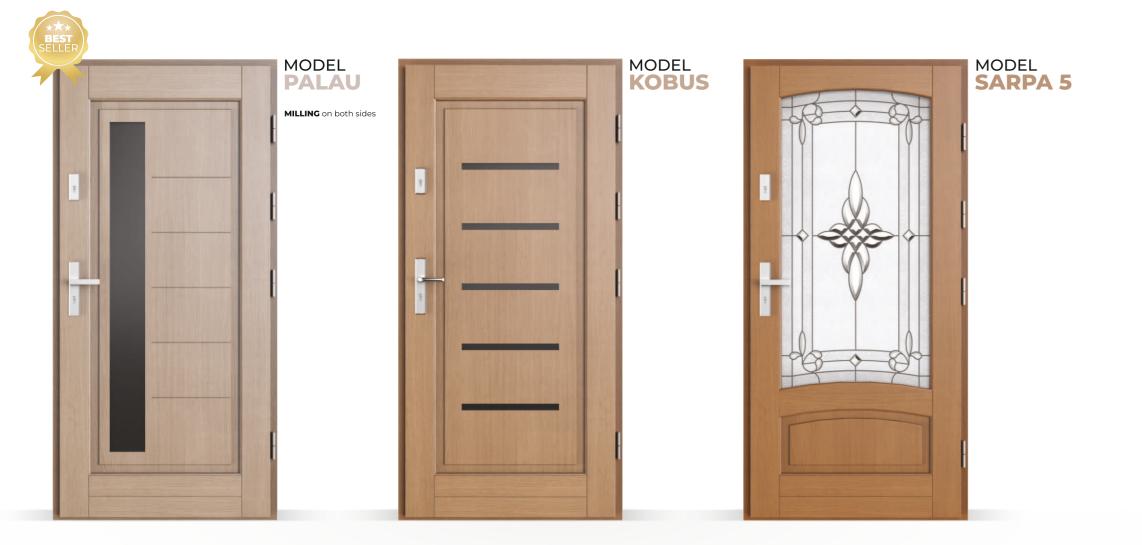





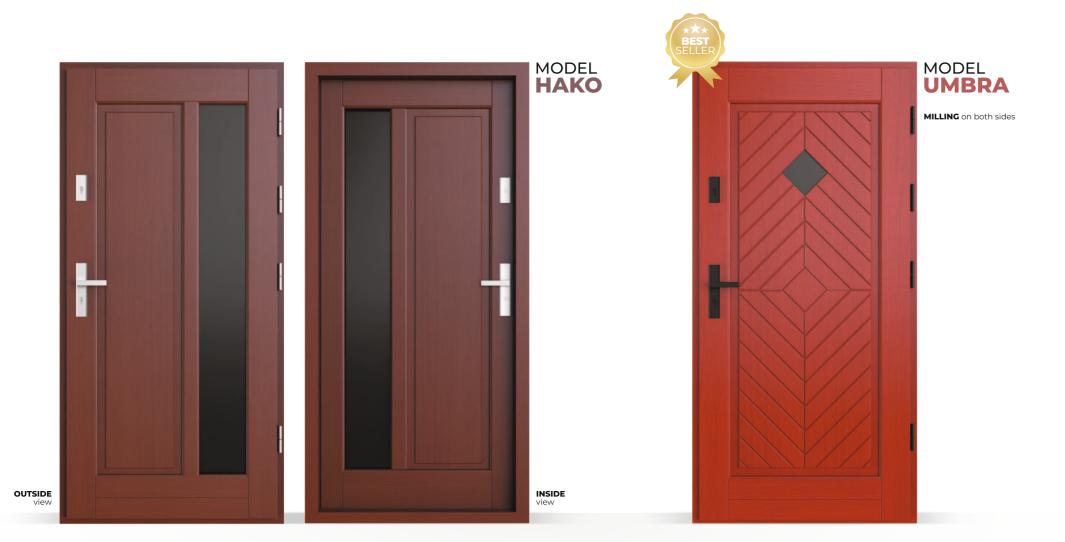















solutions confined in a timeless style.

MODEL **HORIZON** 











































**PINE AND OAK** 

\* THE MINIMUM WIDTH OF THE OUTWARD-OPENING DOOR LEAF IS 850 MM

\* THE MINIMUM WIDTH OF THE OUTWARD-OPENING DOOR LEAF IS 850 MM

TYPES OF **GLAZING** PANE PACKAGE CONSTRUCTION



**CLEAR** GLASS

**STAINED FILM** 

**SANDBLASTED** 

GLASS

GLASS



**BROWN REFLEX** GLASS



**BLACK LAKOBEL** GLASS






**GRAPHITE REFLEX** GLASS



In the entrance door, we use double-layer or three-layer composite glass inserts. It depends on the type of decorated glass. Our glazing technology is based in 80% on the warm edge system. It is a spacer of structural silicone foam made of extruded thermoformed polymer containing a moisture absorbent. It remains flexible over a wide temperature range, always returns to its original shape given in the hardening process and has a low deformation rate.



#### TWO-CHAMBER UNIT SANDBLASTED GLASS

ADVANTAGES OF THE **GLAZING UNIT** 

Increases thermal resistance

• Improves sound absorption

spacer system available today.

Reduces the stress of the edge weld


Increases resistance to condensation

• Raises the temperature on the glass surface


• It is metal-free and has the highest degree

of thermal efficiency of any insulating glass

- 1. Float glass or safety sandblasted glass (4 mm)
- 2. Float glass (4 mm)
- 3. Stopsol Brown Reflex glass (4 mm)
- 4. Hot Melt sealing compound
- 5. Glass combination, frame, warm RAL 9005







#### TWO-CHAMBER UNIT **ENGLISH STAINED GLASS**

- 1. Float glass or safety glass (4 mm)
- 2. Float glass with stained glass (4 mm)
- 3. Bevel glass
- 4. Float glass (4 mm)
- 5. Hot Melt sealing compound
- 6. Glass combination, frame, warm RAL 9005

#### **SAFETY VSG** GLASS

It is created as a result of the permanent glueing of two glass panes with a special foil. As standard, for VSG glass, two identical panes with a thickness of 2, 3, 4, 5 and 6 mm are used. Glass made of thicker panes is made on special order. The laminating film (PVB type) is 0.38 mm thick, a single film provides a basic level of security (P1 class). There are also VSG panes with a double foil with a total thickness of 0.76 mm (P2 class, with increased resistance) and with a quadruple foil, where the foil thickness is 1.52 mm (P4 class, recognized as an anti-burglary standard).

#### **VSG GLASS**

- Anti-burglary (the foil between the panes composed of several layers is extremely difficult to break
- Structural (e.g. in case of glass breakage, it still holds the glass and prevents it from falling out)

#### **ANTI-BURGLARY P4** GLASS

1. Clear glass (4 mm)

2. PVB laminating film (0,38 mm x 4pcs.)

THICKNESS 6,38 MM VSG 3.3.1 • 2 panes 3 mm thick and 1 layer of foil

THICKNESS 8,76 MM THICKNESS 9,52 MM VSG 4.4.2

2 panes 4 mm thick and 2 layers of foil

VSG 4.4.4

2 panes 4 mm thick and 4 layers of foil

#### TWO-CHAMBER UNIT **BLACK STAIR GLASS**

- 1. Float glass with black painted stair glass (4 mm)
- 2. Float glass (4 mm)
- 3. Stopsol Brown Reflex glass (4 mm)
- 4. Hot Melt sealing compound
- 5. Glass combination, frame, warm RAL 9005

TYPES OF **GLAZING** www.agmar.biz.pl

### DOOR **ESPAGNOLETTES**

MOTORIZED

MACO M-TS

ESPAGNOLETTES







**3-POINT** 

**GU AUTOMATIC** 

**ESPAGNOLETTES** 





**Agmar** 



4010 3D FD **BAKA PROTECT** 



THREE-PLANE

**ADJUSTABLE HINGE** 













# **THRESHOLD**

Aluminium strips Nickel

• Patina Black

> THERMAL INSERT FOR WOODEN THRESHOLD

length 120 cm height 3 cm

**3-POINT MACO** ESPAGNOLETTES LOCK Main lock distance 92 mm 

INDIVIDUAL PRICING ADDITIONAL BOLT LOCK LOCK Main lock distance 92 mm 

**4-POINT MACO** ESPAGNOLETTES

MAIN LOCK MOTORIZED Main lock **MAIN LOCK** distance 92 mm Main lock distance 92 mm adjustable doorstrike

ADDITIONAL BOLT LOCK

4-POINT

**GU AUTOMATIC** 

**ESPAGNOLETTES** 

LOCK

Main lock distance 92 mm







#### **AMSTERDAM**

m

• 100 cm • 120 cm

• 150 cm

#### **MONTREAL**

• 80 cm • 100 cm

• 100 cm

• 150 cm

70 cm

## DOOR **ACCESSORIES**

# **Agmar**



























































ELECTRIC DOORSTRIKE + SOLO FITTING














**OPTION 3** 







#### STANDARD COLOR PALETTE

#### FINISH TECHNICAL PARAMETERS

THE INDIVIDUAL GRAIN STRUCTURE OF NATURAL VENEERS DOES NOT GUARANTEE THE COLOUR TO BE REPEATED.



**NATURAL OAK PREMIUM** 



WINCHESTER **PREMIUM** 



**GOLDEN OAK** PREMIUM



HONIG PREMIUM





MICRO-DOVETAILS



THE NATURAL CURVATURE



IN THE COLOUR

Result from different graining.



**DARK OAK PREMIUM** 

**CALIFORNIA OAK** 

PREMIUM



OAK PREMIUM

**BROWN OAK** 

PREMIUM



WALNUT **PREMIUM** 

**RUSTICA** 

**TOSKANA PREMIUM** 



PINE VENEER



OAK VENEER



KNOTTY OAK VENEER



**PREMIUM** 



MARON **PREMIUM** 



**TABAK PREMIUM** 



MOCCA **PREMIUM** 



**RAL 7016** 



CARE KIT FOR

#### **EXTERNAL DOORS**

It removes stains and dust, creates a layer that protects against dirt, refreshes varnished surfaces and gives them a silky shine. We recommend using the care system twice a year. After careful sanding, the surface can be recoated without any problems. Protect against frost. Shelf life in original packaging for at least 3 years.

Kit contents:

- ADLER Top-Cleaner 100 ml
- ADLER Door-Finish 100 ml
- Oil for the care and maintenance of fittings 20 ml
- 1 cleaning cloth



**RAL 6005** 





**RAL 9016** 



**RAL 7024** 



STANDARD COLOR PALETTE www.agmar.biz.pl